



Modulare Spreiztraversen OX SB-250

Technische Daten

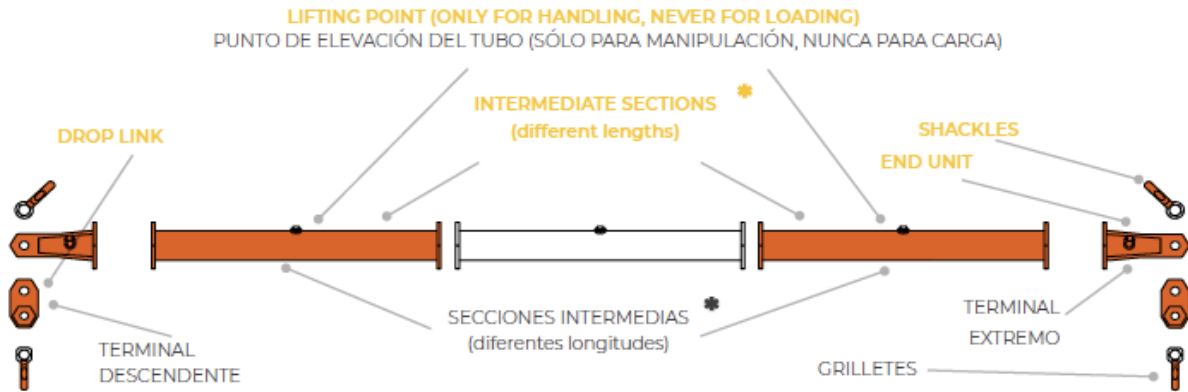

- Es können bis zu 5 Zwischenstücke eingefügt werden

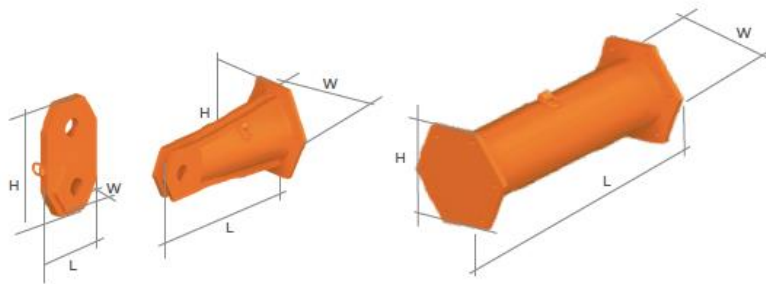


Code	Model	Gewicht (kg)	Abmessungen L x W x H (mm)
80220250S050	OX-SB-250 Section 500mm	276,6	500 x 772 x 672
80220250S100	OX-SB-250 Section 1000mm	353	1000 x 772 x 672
80220250S200	OX-SB-250 Section 2000mm	505,7	2000 x 772 x 672
80220250S300	OX-SB-250 Section 3000mm	658,4	3000 x 772 x 672
80220250S400	OX-SB-250 Section 4000mm	811,2	4000 x 772 x 672
80220250S500	OX-SB-250 Section 5000mm	964	5000 x 772 x 672
80220250S600	OX-SB-250 Section 6000mm	1116,7	6000 x 772 x 672
80220250E	OX-SB-250 End Unit 1000mm	435	1200 x 772 x 672
80220250D	OX-SB-250 Drop Link	135,5	395 x 115 x 725



Schäkel:




Model	Oberseite	Unterseite
Schäkel mit Splint	200t Gewicht 183 kg	125t Gewicht 84 kg

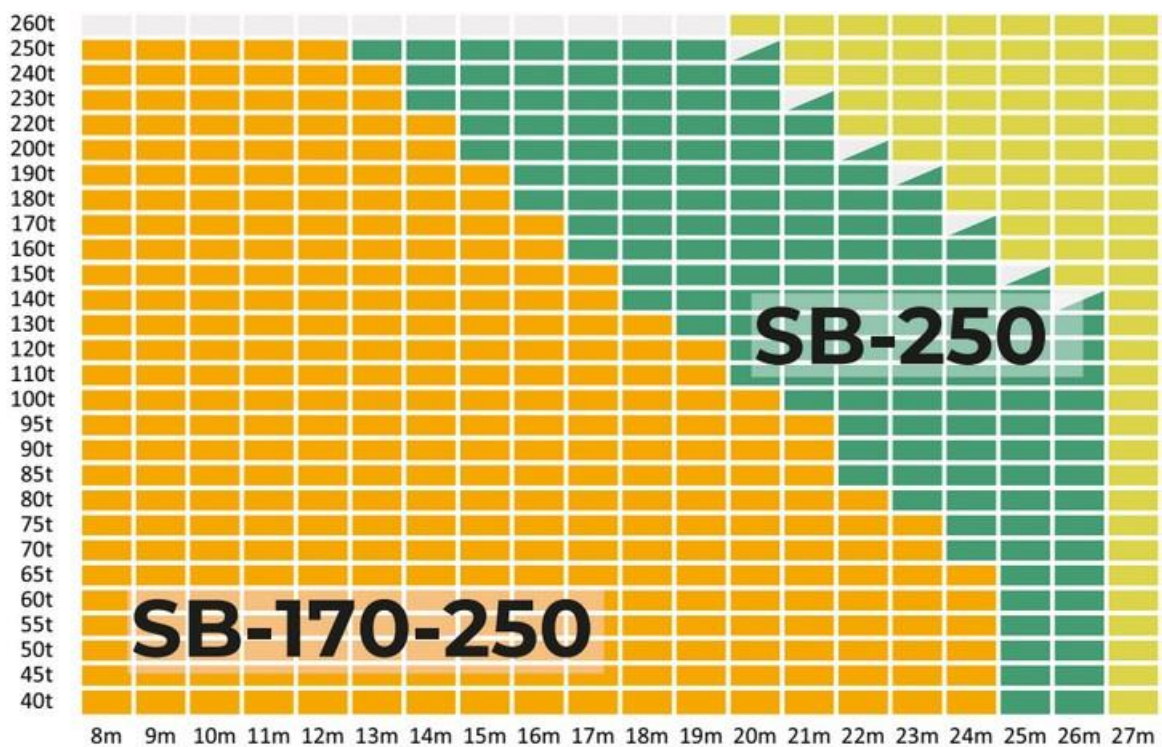

Tragfähigkeit vs. Spannweite / Anschlagwinkel 30°

Anschlagwinkel:

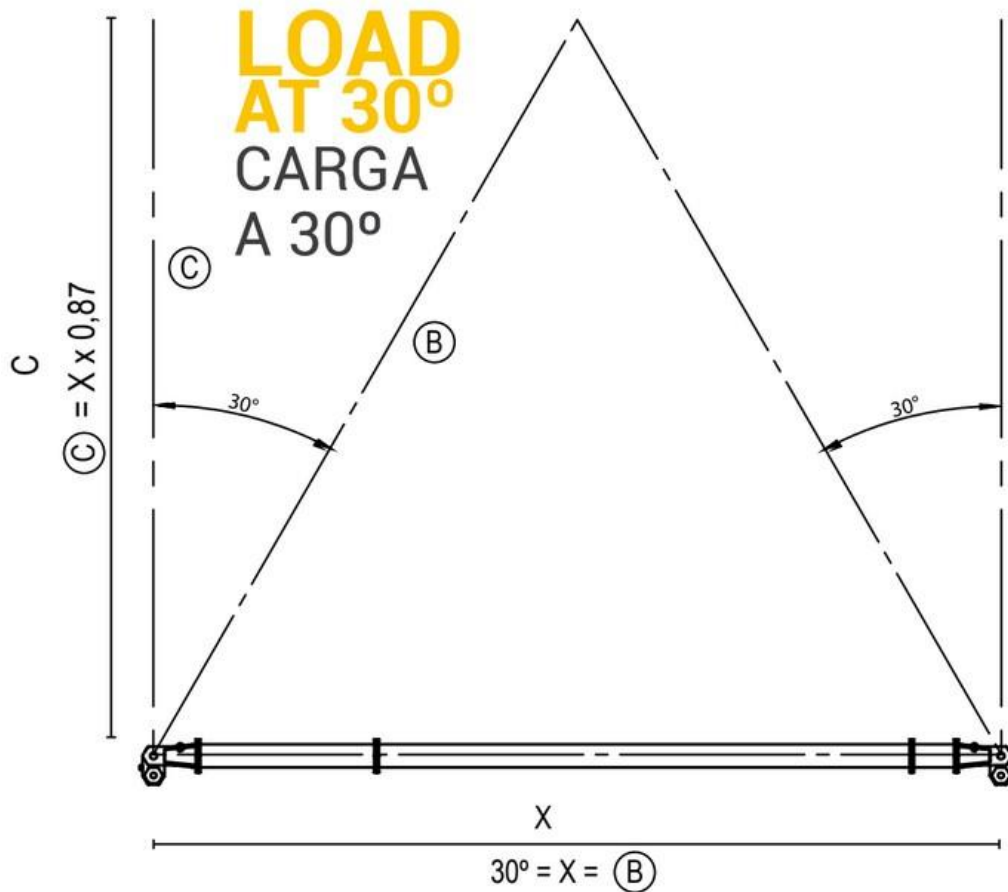

Änderung der Tragfähigkeit durch Anschlagwinkel und Spannweite

Länge (M)	2-15m	16m	17m	18m	19m	20m	21m	22m	23m	24m	25m	26m
30° WLL (t)	250	250	250	250	250	250	230	210	190	172	155	140

